

Rocket Pump TOUCH

Description	Part No:
Pocket Pump TOUCH 20-500 ml/min with Li-Ion battery and mini tool kit. Requires a charger, see below	220-1000TC
Pocket Pump TOUCH Single Pump Vapour Kit includes pump, single charger, single low-flow Tube Holder with Type A cover, Tube Breaker, mini tool kit, Basic Step by Step Guide and carry case.	220-1000TCKV
Pocket Pump TOUCH 5 Pump Vapour Kit includes 5 pumps as described above, 5 USB charging cables, one 5-port USB charging hub with power cable, 5 x single low-flow Tube Holders with Type A covers, Tube Breaker, 5 x mini tool kits, 3 x Basic Step by Step Guides in a carry case.	220-1000TCK5V
Accessories	Part No:
Single Charger comprises a mains adapter with a USB output and USB charging cable	220-300A
Five-port USB Hub for Pocket Pump TOUCH Chargers	220-400
USB Charging Cable	P75739
Quick-connect Bag Sampling Adapter	220-200
DataTrac Pro USB Bluetooth Adapter	877-94

ATEX certified for potentially explosive gas atmospheres.
 Pocket Pump TOUCH contain Li-Ion batteries and may be subject to special shipping regulations.
 Replacing batteries with non-approved battery packs voids any warranty and UL, IECEx and ATEX
 Certifications for Intrinsic Safety

Rocket Pump TOUCH

A strategic move in sample pumps - 20 to 500 ml/min



Intuitive TOUCH screen for easy operation and calibration



Bluetooth communication with PC - monitor pump status remotely



Pocket Pump TOUCH

SKC


World Leader in Sampling Technologies

www.skcltd.com

- Intuitive touch screen operation and calibration
- Constant flows from 20 to 500 ml/min
 - Accomodates typical flow rates for sorbent tubes
 - Constant pressure from 1.87 to 37.4 mm Hg
- Bluetooth wireless connectivity with PC and DataTrac Pro Software
- Magnetic charging connector
- Constant battery status display
- Powerful Li-Ion battery for > 20 hour run times
 - Power-saving auto dim and low energy Bluetooth features
 - Extended run times with USB/charger
- Only 235g (8.3 oz)
- Multi-tube sampling - save time and use fewer pumps
 - Sample with up to four tubes simultaneously
- Automatic flow fault and restart
- Secure screen during sampling with auto-lock feature
- Designed to meet ISO 13137




Bluetooth® communications with PC
and DataTrac® Pro Software

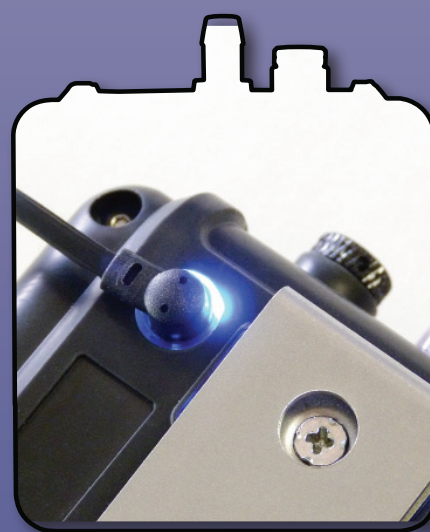

USB charging with magnetic connector
and sure-connect LED indicator



Optional quick-connect for
secure bag sampling

Flow Range in Constant Flow Mode	20 to 500 ml/min
Compensation Range in Constant Flow Mode	20 to 500 ml/min up to 20 inches water back pressure
Pressure Range in Constant Pressure Mode	1 to 20 inches (1.87 to 37.4 mm Hg)
Flow Control System	Corrects for changes in back pressure, temperature and atmospheric pressure.
Power	Removable rechargeable Lithium-ion (Li-Ion) battery, 3.6 V, 2.6 Ah, 9.36 Wh or charger
Run Time (Li-Ion)	20+ hrs at 500 ml/min up to 20 inches water back pressure, extended run times available with charger
Charging Time (varies with battery capacity and level of discharge)	≤ 10 hrs (≤ 4.5 hrs to 80%)
Accuracy	Constant flow control: ± 5% of set-point or ± 3 ml/min, whichever is higher Atmospheric pressure: ± 0.3 in Hg Temperature: ± 1 °C Real-time clock: ± 1% Constant pressure mode: Reading ± 0.5 inch water
Temperature Ranges	Operating: 0 °C to 45 °C (32 °F to 113 °F) Charging: 0 °C to 45 °C (32 °F to 113 °F) Storage: -20 °C to 45 °C (-4 °F to 113 °F)
Humidity Ranges	≤ 95 % RH, non-condensing
Altitude	Corrects flow for changes in temperature 0 to 45 °C (32 °F to 113 °F) and ambient pressure up to 4,572 m (15,000 ft) above and down to 701m (2,300 ft) below sea level
Flow Fault	After 3 seconds of restricted flow, pump stops running, elapsed time continues, and pump displays fault icon. After 5 seconds in fault, auto-restart is attempted every 5 seconds up to 5 times unless full airflow is restored prior to that. If full airflow is not corrected within 25 seconds, the pump ends the run and displays sample summary.
Display/Parameters	High contrast backlit LCD/time, date, battery status, flow rate, sample volume, temperature, atmospheric pressure, programmed run remaining time and elapsed run time.
User Interface	Eight area capacitive touch screen with auto-dim and locking options.
Dimensions	8.1cm x 9.7cm x 3.8cm (3.2" x 3.8" x 1.5")
Weight	235g (8.3 oz)
Intrinsic Safety Certifications	SKC Part No: 220-1000TC sample pump operated with SKC battery pack Part No: P76303 ATEX -  II 1 G Ex ia IIC T4 Ga DEMKO 16ATEX 1600 IECEX - Ex ia IIC T4 Ga IECEX UL 16.0113 UL - Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III, T4 Class I, Zone 0, Group IIC T4, Exia -20°C ≤ Ta ≤ 45°C UL Listed E62011
Other Certifications	CE marked and RoHS compliant
Case Material	IP 64-rated case, polycarbonate with rubberised anti-static overmoulding
Communication with PC	Low energy Bluetooth, requires DataTrac Pro for Pocket Pump TOUCH USB Bluetooth adaptor (Part No. 877-94)