



1 Front View

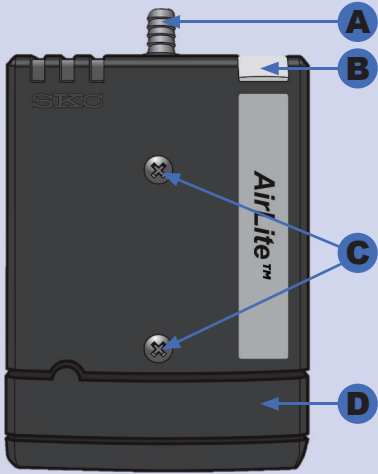

- A. Inlet
- B. Protective control cover
- C. Accessory mounting screws
- D. Battery compartment

2 Top View

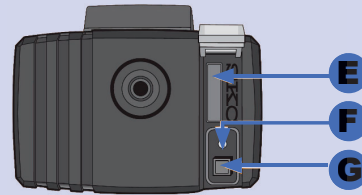

- E. Digital LCD
- F. Flow adjustment
- G. On/off button

3 Installing the Batteries

Loosen screw on bottom of case.


Open and remove compartment door.

Insert three AA-size batteries.


Insert hinge of compartment door under lip of case.

Close door.

Tighten screw on bottom of case.

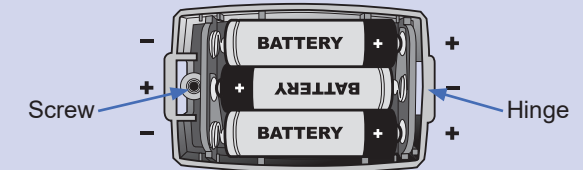

4 Running the Pump

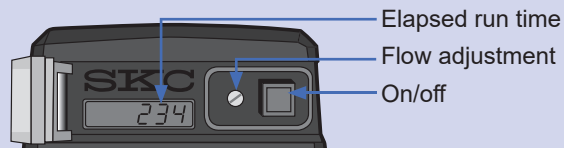

Press on/off button to start and stop pump. Pressing on/off button to start pump clears elapsed time display.

Adjust flow using small slotted screwdriver to turn flow adjustment screw.

5 Possible Displays During Sampling

Elapsed Run Time — up to 999 minutes (16.65 hours)

Flow or Battery Fault — Flow fault icon or battery-shaped icon depending on cause of shutdown

6 Registering the Pump

Registering the AirLite Sample Pump with Timer is as easy as going to the SKC website. Registering your pump provides the added benefits of the latest product information and free technical support.



www.skinc.com/product-registration

Cautions

- ⚠ Do not operate pump in hazardous locations. Pump is **not** UL Listed for intrinsic safety.
- ⚠ To prevent corrosion of battery terminals, remove batteries when AirLite with Timer will not be used for an extended time.
- ⚠ Failure to follow warnings and cautions voids any warranty.

NOTE: If using rechargeable AA-size 1.2-volt NiMH batteries, run time will be approximately half that stated for disposable batteries.

FREE Technical Support

Rely on SKC Tech Support for the answers you need. Our experts are ready to help!

Email: skctech@skcinc.com

Ordering Accessories

Accessories	Cat. No.
Filter Cassette Holder , accommodates two or three-piece 25 or 37-mm cassettes with or without a cyclone, clips to a worker's collar	225-1
Low Flow Adapter Kit (5 to 500 ml/min) includes All-in-One low flow holder and Type A tube cover	110-500
Protective Nylon Pump Pouch , black, with belt loop	224-902
Medium Flow chek-mate Flowmeter , 0.5 to 5 L/min, includes 9-volt battery, available with NIST, UK, or ISO standard traceable calibration certificate	375-0550 Series
Replacement Part	
Battery Case Cover	P20184

Call SKC at 724-941-9701 (800-752-8472 [U.S.]) to place your order today.


Order online at www.skcinc.com.

SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to www.skcinc.com/warranty-information.



SCIENCE. SERVING PEOPLE.™

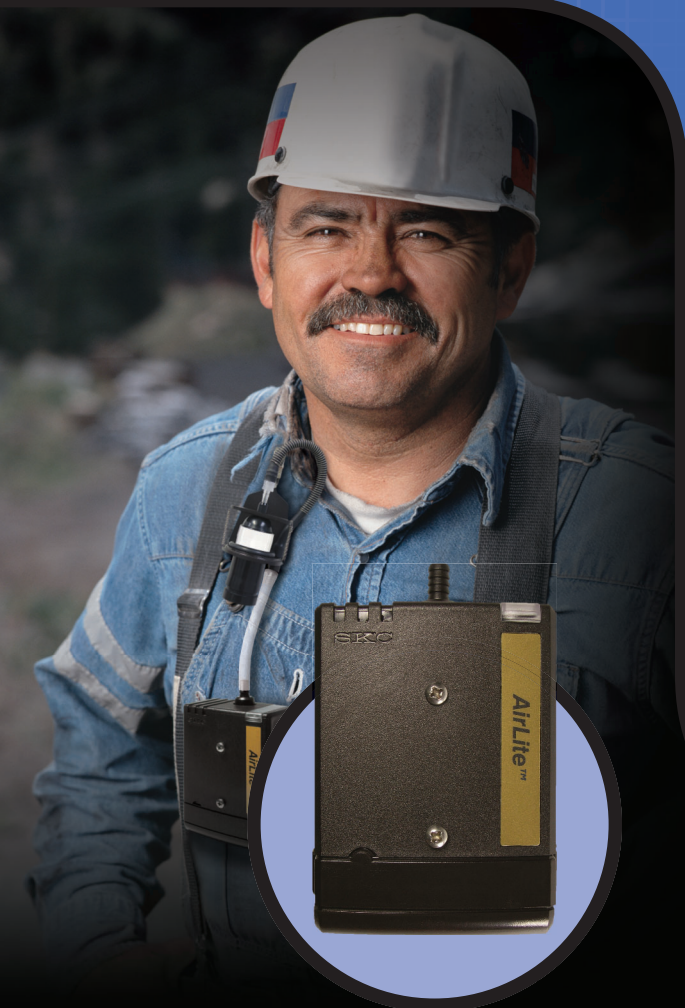

Start-up Guide

Congratulations on the purchase of the AirLite Sample Pump with Timer — only from SKC.

For complete pump operating instructions, visit www.skcinc.com and search on this product.