USB DRIVE

Enable **USB Drive** in the **Instrument Setup** menu to transfer data to your PC via USB cable. Once your SoundCHEK Connect is plugged into your PC, the USB Drive Active screen will be displayed.

Your SoundCHEK Connect will be visible as a folder on your PC. Files can be copied and deleted as required.

CSV files can be opened directly in most spreadsheet applications and **.wav** files can be played in most media players.

CHEKBox

SKC CHEKBox

SoundCHEK Connect Sound Level Meter uses cloud-based software. Log in or register your account at

skcCHEKBox.com

REGISTERING THE INSTRUMENT

Registering the SoundCHEK Connect Sound Level Meter is as easy as going to the SKC website. Registering your sound level meter provides the added benefits of the latest product information and free technical support.

www.skcinc.com/product-registration



SKC Limited Warranty and Return Policy
SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to www.skcinc.com/warranty-information.

ORDERING ACCESSORIES

Accessories	Cat. No.
AcoustiCHEK Calibrator, for ½-inch microphones, includes AA batteries and Certificate of Manufacturer Calibration	
Class 1, with built-in barometer	**703-001**
Class 2	**703-002**
Replacement Microphone, Class 1, ½-inch pre-polarized 50 mV/Pa electret capsule	**702-021**
Replacement Microphone, Class 2, ½-inch pre-polarized 25 mV/Pa electret capsule	**702-019**
Replacement Windscreen, 2.5-inch diameter for ½-inch microphones	**702-016**
Pre-amp Assembly	**702-022**

Call SKC at 724-941-9701 (800-752-8472 [U.S.]) to place your order today.

Order online at www.skcinc.com.

FREE TECHNICAL SUPPORT

Rely on SKC Tech Support for the answers you need. Our experts are ready to help!

E-mail: skctech@skcinc.com

SCIENCE. SERVING PEOPLE.™

Form 37178 Rev 261012

SKC

SCIENCE. SERVING PEOPLE.™


START-UP GUIDE

Congratulations on your purchase of the SoundCHEK Connect Sound Level Meter — only from SKC.

For complete sound level meter operating instructions, visit www.skcinc.com and search on this product.

SoundCHEK Connect

INSTRUMENT OVERVIEW

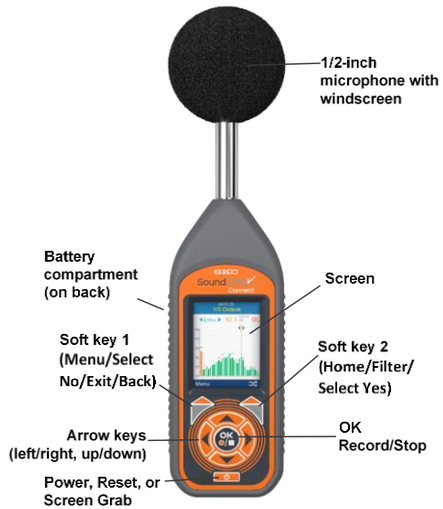

Instrument Icons
Several icons are displayed on the sound level meter to easily identify its functionality or useful settings.
***Note**: The following table is not all inclusive.*

	Low Measuring Range Active
	High Measuring Range Active
	User Template Active
	Voice Memo Recorded (Flashes while recording)
	Noise Event Recorded (Flashes while recording) *
	USB Active
	WiFi Connected / Signal Strength
	Battery Charge
	Recording Data Active
	Recording Data Stopped
	File Review Active
** Where option fitted*	

OPERATION

Select Measurement Screens
Use the **up** and **down** arrow keys to scroll through the different measurement screens available.

Press the **left** or **right** arrow key to change the parameter being viewed. To switch between Measurements 1 and 2, press **Soft Key 2**.

Select Templates & Settings

All data Recording settings can be found under **Measurement Setup**. To find a template for your application, press **Menu, Template Manager, Load Template**.

To record data at specific time intervals, enable Time History. For a specific recording length and/or record start time, use the available Timer functions.

Record

To manually start recording: Navigate to a measurement screen and press the **Record** key; a red **Record** symbol will be displayed in the bottom bar.

To stop recording: Press the **Stop** button; a yellow **Stop** symbol will be displayed in the bottom bar. Select an option to continue.

Noise Event Recording: If your SoundCHEK Connect is fitted with this option and it is enabled, manually initiate a Noise Event during a recording by pressing **Soft Key 1** labeled **Rec Event**. To stop the Noise Event, press **Soft Key 1** again.

File Review

Review a saved recording automatically or manually. Enable and disable Auto File Review under the **File Manager** menu. During playback, a green **Play** symbol will be displayed in the bottom bar. Press **Soft Key 1** for various options, including **Exit** to exit from File Review mode.

WiFi

To send data to your account at **skcchekbox.com** directly from your SoundCHEK Connect using a Wi-Fi connection, ensure Wi-Fi is enabled on the instrument and connected to a network within range.

To connect, elect a desired network from the **WiFi Networks** screen and enter your password. Details will be saved, and the instrument will automatically reconnect in the future.

Under **Network Settings, DHCP** should normally be enabled. Some older Wi-Fi routers may require details entered manually. Contact your network administrator for assistance.

Files and Audio Recordings can be set to automatically send after a recording in the **WiFi** menu. To send files manually, use the **File Manager** menu.

MENU STRUCTURE

Measurement Setup
- Function
- Weightings & Range
- Results Selection
- Exposure
- Data Recording
- Statistics
- Audio Recording
- Save As Template

File Manager
- Load File
- Send Files To Cloud
- Clear Cloud File Queue
- Delete File
- Delete All Files
- Auto File Naming
- Auto File Review
- Save CSV File

Template Manager
- Load Template
- Create Template
- Edit Template
- Delete Template
- Save Current Setup

Hearing Protection

Instrument Setup
- WiFi
- Screen
- Date
- Time
- Language
- Information
- SPL Bar Levels
- USB Drive
- Support

Calibration

Startup Options
- Calibration Reminder
- Calibrate Instrument

SoundCHEK Connect