


1 Front and Top Views

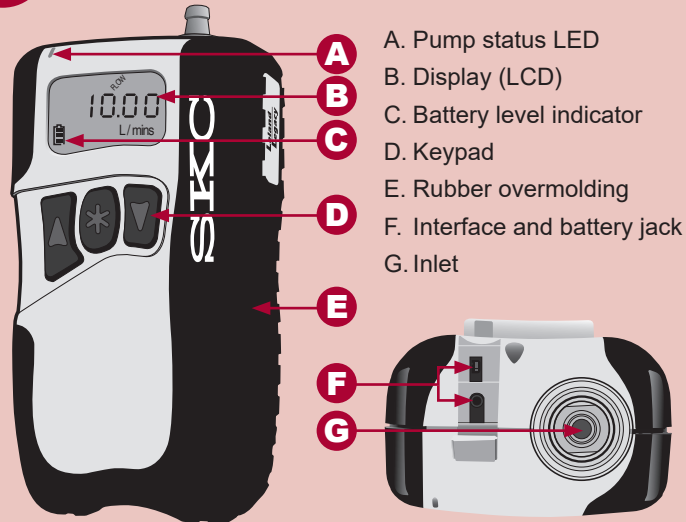


2 Installing the Battery

Align battery pack connector with connector inside pump.

Press battery into pump body until flush with pump case.

Insert and tighten 3 screws (longest screw in top hole).

Charge battery completely.

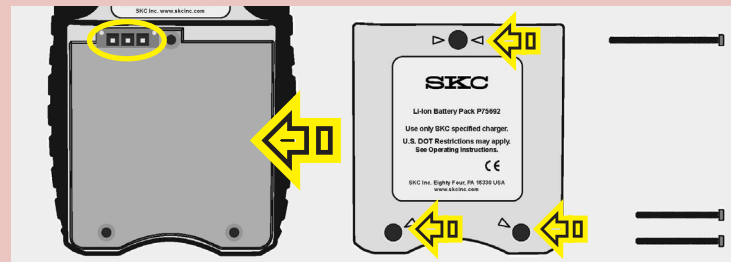


3 Charging the Battery

with a single charger



Completely charge battery pack before operating pump!
Battery recharge time: 15 hours

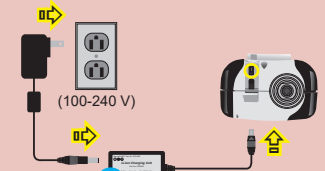

Reading Charging Status LED
Observe steadily for > 5 seconds.

LED Action				Charge Status
ON steady				Charge in progress
ON 2 sec	OFF .25 sec	ON 2 sec	(Repeats)	Approximately 80% charged
OFF 2 sec	ON .25 sec	OFF 2 sec	(Repeats)	Charge completed



4 Using the Keypad



* Scrolls through run time data and setup options

▲ ▼ Increase or decrease values such as flow rate and toggle between display choices

Key Sequences (in operating instructions)
▼ * Press keys individually.

[▲ ▼] Press keys simultaneously.

▲▼ Security code. Press in sequence to enter Setup.

5 Running the Pump

Operation

Turn on pump

Turn off pump

Change modes

Keypad

Press and hold any key.

Manual: Press and hold * until countdown initiates.

Auto-off: Pump enters sleep after 5 minutes in hold without activity.

Press [▲ ▼] to toggle between Run and Hold.

Display



6 Registering the Pump

Registering the Leland Legacy Pump is as easy as going to the SKC website. Registering your pump provides the added benefits of the latest product information and free technical support.



www.skcinc.com/product-registration

Cautions

- ⚠ Do not charge or operate pump from charger in hazardous locations. Pump is **not** UL Listed for intrinsic safety.
- ⚠ Use only the SKC-approved charger for this pump. Use of an unapproved charger may damage the battery and pump and voids any warranty.
- ⚠ Use of any device other than the approved battery pack to power the pump voids any warranty.
- ⚠ Failure to follow warnings or cautions voids any warranty.

NOTE: The battery pack may be kept on the SKC-approved charger for an indefinite time.

FREE Technical Support

Rely on SKC Tech Support for the answers you need. Our experts are ready to help!

Email: skctech@skcinc.com

Ordering Accessories

Accessories	Cat. No.
Single Charger	100-240 V 223-241
Take Charge 5 , five-station charger for Li-Ion batteries	100-240 V 223-441
Battery Charging Adapter , for charging batteries outside the pump	223-248
Protective Pump Pouch Black, noise reducing	224-89
DataTrac® Software Cable , for Leland Legacy, USB; <i>software available via free download</i>	877-92
High Flow chek-mate Flowmeter , 5 to 30 L/min, includes 9-volt battery, available with NIST, UK, or ISO standard traceable calibration certificate, <i>requires Pulsation Dampener Cat. No. 375-150 for flow verification of high flow pumps and CalChek single-point flow verification/ full calibration of Leland Legacy pump</i>	375-50300 Series
Replacement Parts	
Battery Pack† , Li-Ion	P75692C
Inlet Filter/O-ring Set , 5 filters and 1 O-ring	P40021B

† Li-Ion batteries are subject to special shipping regulations

Call SKC at 724-941-9701 (800-752-8472 [U.S.]) to place your order today.

Order online at www.skcinc.com.

SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to www.skcinc.com/warranty-information.



SCIENCE. SERVING PEOPLE.™



Leland Legacy™

Start-up Guide

Congratulations on the purchase of the Leland Legacy Sample Pump — only from SKC.

For complete pump operating instructions, visit www.skcinc.com and search on this product.